

SPECIFICATION SHEET FOR CL₂ SENSOR MINI CL2-4/20

Nominal Range 0 – 20 ppm
Maximum Overload 200 ppm
Expected Operation Life 2 years in air
Output Signal -600 +/- 150 na/ppm
Resolution 0.1 ppm
Temperature Range - 40 °C to + 50 °C
Pressure Range Atmospheric +/-10 %
t₉₀ Response Time < 50 sec
Relative Humidity Range 15 % to 90 % R.H. non-condensing
Typical Baseline Range (pure air, 20°C) -0.1 ppm to 0.2 ppm
Maximum Zero Shift (+20°C to +40 °C) -0.2 ppm
Expected Long Term Output Drift < 5 % signal loss/6 month
Recommended Load Resistor 10 Ohm
Bias Voltage Not required
Repeatability < 2 % of signal
Output Linearity Linear

Weight ~ 5.4 g
Position Sensitivity None
Storage Life Six months in container
Recommended Storage Temperature 5 °C – 20 °C
Warranty Period 12 months from date of dispatch




CROSS-SENSITIVITY DATA

Interfering Gas Concentration Reading
Br₂ 20 ppm < 2 ppm
ClO₂ 3 ppm < 3 ppm
F₂ 8 ppm < 8 ppm

Performance data conditions:
20 °C, 50% RH and 1013 mbar

APPLICATIONS

Safety and Environmental Control
For Portable Gas Detectors

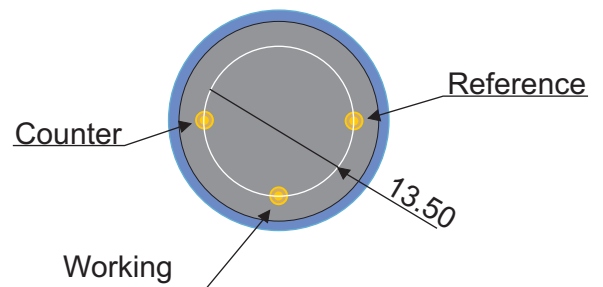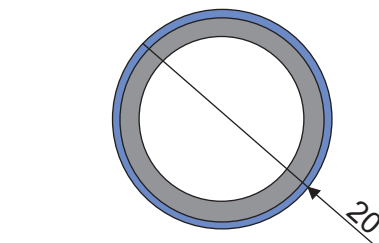

All dimensions in mm
All tolerances +/- 0.15 mm