

SPECIFICATION SHEET FOR C₂H₄ SENSOR MINI C2H4-4/200

Nominal Range 0 – 200 ppm
Maximum Overload 500 ppm
Expected Operation Life 2 years in air
Output Signal 70 +/- 20 na/ppm
Resolution 1 ppm
Temperature Range - 40 °C to + 50 °C
Pressure Range Atmospheric +/-10 %
t₉₀ Response Time < 40 sec
Relative Humidity Range 15 % to 90 % R.H. non-condensing
Typical Baseline Range (pure air, 20°C) -1 ppm to 4 ppm
Maximum Zero Shift (+20°C to +40 °C) 1 ppm
Expected Long Term Output Drift < 5 % signal loss/ month
Recommended Load Resistor 10 Ohm
Bias Voltage Not required
Repeatability < 2 % of signal
Output Linearity Linear

Weight ~ 5.4 g
Position Sensitivity None
Storage Life Six months in container
Recommended Storage Temperature 5 °C – 20 °C
Warranty Period 12 months from date of dispatch




CROSS-SENSITIVITY DATA

Interfering Gas Concentration Reading
CO 100 ppm < 60 ppm

Performance data conditions:
20 °C, 50% RH and 1013 mbar

APPLICATIONS

Safety and Environmental Control
For Portable Gas Detectors

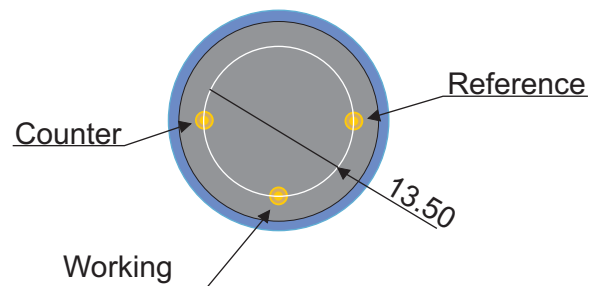

All dimensions in mm
All tolerances +/- 0.15 mm