



AE-HP-R2

AIRWAVE ELECTRONICS

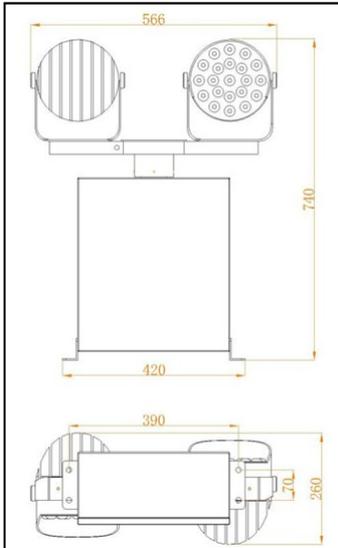

AIRWAVE ELECTRONICS

www.gasdetect.com

Shipping: Airwave Electronics Ltd.
Suite 104, 1610 - 20th Street
Didsbury, AB T0M 0W0

Postal: Airwave Electronics Ltd.
Box 2, Site 18, RR 1
Didsbury, AB T0M 0W0

403-335-9875
Telephone

AE-HP-R2 LED Airport Rotating Beacon

Specifications:

Light Source:	LED
Emitting Colour:	White and yellow, white and green or others
Intensity (cd):	25000cd
Light Beam Center:	5 above horizontal
Flash Characteristics:	24 flashes per minute
LED Operation Mode:	Steady burning
Service Life of LED:	>100,000 hours
Operating voltage:	220/240 AC or 110/120 VAC
Circuit Protection:	Integrated
Body Material:	UV protected polycarbonate
Base Material:	Powder-coated stainless steel 304
Mounting:	390 X 70 X Ø12
Dimension (mm):	566 X 260 X 740
Weight (kg):	22
Product Life Expectancy:	Average 5 years
Ambient Temperature (C):	-40~85
Humidity:	10~90%
Wind Speed:	80 m/s
Waterproof:	IP66
ICAO:	ICAO Annex 14 Volume I 5.3.3
FAA:	FAA L-801, L-802

- ✓ LED as light source 100,000 hours typical lamp life.
- ✓ Two head, two emitting lights.
- ✓ No maintenance.
- ✓ All moving parts are permanently lubricated.
- ✓ Impedance-protected motor eliminates burnouts.
- ✓ 12 RPM rotation, 24 flashes/minute.
- ✓ Weatherproof stainless steel cabinet, powder-coated international aviation yellow.
- ✓ Helipad/Heliport/Helideck and Airport application.

